NVIDIA® GeForce 7025 / nForce 630a

















Detail Speci	ification < < <
Platform	- Micro ATX Form Factor: 9.6-in x 7.0-in, 24.4 cm x 17.8 cm
CPU	- Support for Socket AM2+ / AM2 processors: AMD Phenom™ FX / Phenom / Athlon 64 FX / Athlon 64 X2 Dual-Core / Athlox 22 Dual-Core / Athlox 64 / Sempron processor Support for AM3 processors: AMD Phenom™ II X6/ X4 / X3 / X2 / Athlon II X4 / X3 / X2 / Sempron processors Six-Core CPU Ready Supports UCC feature (Unlock CPU Core) Supports UCC feature (Unlock CPU Core) Supports AMD's Cool 'n' Quiet Technology FSB 1000 MHz (2.0 GT/s) Supports Untied Overclocking Technology Supports Hyper-Transport Technology
Chipset	- NVIDIA® GeForce 7025 / nForce 630a
Memory	Dual Channel DDR2 memory technology     2 x DDR2 DIMM slots     Supports DDR2 1066/800/667/533 non-ECC, un-buffered memory     Max. capacity of system memory: 8GB
Expansion Slot	- 1 x PCI Express x16 slot - 1 x PCI Express x1 slot - 2 x PCI slots
Graphics	- Integrated NVIDIA® GeForce 7025 graphics - DX9.0 VGA, Pixel Shader 3.0 - Max. shared memory 256MB - Supports D-Sub with max. resolution up to 1920x1440 @ 60H
Audio	- 5.1 CH HD Audio (VIA® VT1708S / VT1705 Audio Codec)
LAN	- Realtek PHY RTL8201EL / 8201CL - Speed: 10/100 Ethernet - Supports Wake-On-LAN
Rear Panel I/O	I/O Panel - 1 x PS/2 Mouse Port - 1 x PS/2 Keyboard Port - 1 x PS/2 Keyboard Port - 1 x Serial Port: COM1 - 1 x VGA Port - 4 x Ready-to-Use USB 2.0 Ports - 1 x RJ-45 LAN Port with LED (ACT/LINK LED and SPEED LED) - HD Audio Jack: Line in / Front Speaker / Microphone
Connector	- 4 x Serial ATAII 3.0 Gb/s connectors, support RAID (RAID 0, RAID 1, RAID 0+1, RAID 5 and JBOD), NCQ and "Hot Plug" functions - 1 x ATA133 IDE connector (supports 2 x IDE devices) - 1 x Fioppy connector - 1 x Print port header - CPU/Chassis FAN connector - 24 pin ATX power connector - 4 pin 12V power connector - Front panel audio connector - 2 x USB 2.0 headers (support 4 USB 2.0 ports)
BIOS Feature	- 4Mb AMI Legal BIOS - Supports "Plug and Play" - ACPI 1.1 Compliance Wake Up Events - Supports jumperfree - SMBIOS 2.3.1 Support - Supports Smart BIOS
Support CD	- Drivers, Utilities, AntiVirus Software (Trial Version), ASRock Software Suite (CyberLink DVD Suite - OEM and











ASRock UCC





os

Certifications

Accessories

#### **Product Brief** < < <

- Supports ASRock UCC Unlock CPU Core feature
- Hyper Transport 2000 MT/s
- Supports Dual Channel DDR2 1066
- Integrated NVIDIA® GeForce 7025 graphics, DX9.0 VGA, Pixel Shader 3.0, Max. shared memory 256MB
- Supports ASRock Instant Boot, Instant Flash, OC DNA, ASRock OC Tuner (Up to 132% CPU frequency increase)
- Supports Intelligent Energy Saver (Up to 20% **CPU Power Saving)**
- Free Software : CyberLink DVD Suite OEM and Trial: Creative Sound Blaster X-Fi MB - Trial

ASRock Software Suite (CyberLink DVD Suite - OEM and Trial: Creative Sound Blaster X-Fi MB - Trial) - ASRock OC Tuner **Unique Feature** Intelligent Energy Saver
Instant Boot
ASRock Instant Flash ASRock OC DNA - Hybrid Booster:
- CPU Frequency Stepless Control
- ASRock U-COP - Boot Failure Guard (B.F.G.) - ASRock AM2 Boost: ASRock Patented Technology to boost memory performance up to 12.5% CPU Temperature Sensing Hardware Monitor Chassis Temperature Sensing CPU Fan Tachometer Chassis Fan Tachometer
CPU Quiet Fan

Voltage Monitoring: +12V, +5V, +3.3V, Vcore

Quick Installation Guide, Support CD, I/O Shield

/ XP 64-bit compliant

2 x SATA data cables (optional)

Microsoft® Windows® 7 / 7 64-bit / Vista™ / Vista™ 64-bit / XP

The specification is subject to change without notice. The brand and product names are trademarks of their respective companies. Any configuration other than original product specification is not guaranteed.

NVIDIA® GeForce 7025 / nForce 630a









# ASRock UCC (Unlock CPU Core)

World's First NVIDIA Chipset Motherboard Supports Unlock CPU Core


#### Step 1

Press "F2 or DEL" to enter the BIOS.




#### Step 3

- "ASRock UCC" set to Enabled.
- Press "F10" to save change and exit.



#### Step 5

**CPU Information Under OS** 



#### Step 2

AMD CPU Core X2/X3

AMD CPU Core X4


Choose the "OC Tweaker" page and "ASRock UCC" option!



With ASRock UCC , one simple click in BIOS can unlock CPU core to enjoy an instant performance boost.


#### Step 4

- Press "F2 or DEL" to enter the BIOS.
- Processor Type unlock to "AMD Phenom II X4 05e" under "Main" page.



#### Step 6

Before and After UCC

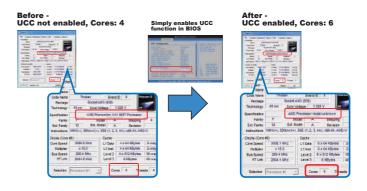


NVIDIA® GeForce 7025 / nForce 630a



#### **ASRock OC Tuner:**

ASRock OC Tuner is a user-friendly and untied tool which allows you to guard your system by hardware monitor function and overclock your hardware devices to get the best system performance






### **Energy Saving:**

Supports ASRock Intelligent Energy Saver (I.E.S)





CPU Power saving up to 20%

NVIDIA® GeForce 7025 / nForce 630a





### **OC DNA**

Save your OC settings as a profile and share with friends. Try OC DNA now!

### **OC DNA Instruction**


#### Step 1

Save your BIOS OC settings as User Default in BIOS OC Tweaker menu. (For example: we name this User Default setting as "CPU\_OC3.8GHz")




#### Step 3

Press "Save" button to save the "CPU\_OC3.8GHz" OC settings as a profile.

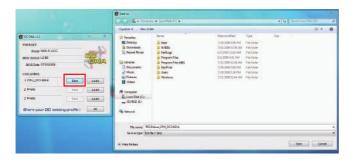

#### Step 5

When the friend receives your "CPU\_OC3.8GHz" profile, he can press "Load" to load the "CPU\_OC3.8GHz" profile in OC DNA.

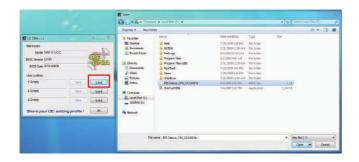

Now, you have successfully share your OC setting profile with your friends.

#### Step 2

Execute ASRock OC DNA under OS, you will find "CPU\_OC3.8GHz" as User Profile 1.



#### Step 4

Send the "CPU\_OC3.8GHz" profile to other friends.



#### Step 6

After that, the friend can enter into BIOS OC Tweaker menu to load the "CPU\_OC3.8GHz" profile as his BIOS OC settings.



NVIDIA® GeForce 7025 / nForce 630a





#### **ASRock Instant Boot**

ASRock Instant Boot is a new feature invented exclusively by ASRock. It can boot up system in an amazing speed,

which is 10 times faster than traditional boot up. For home users or office PC users, ASRock Instant Boot can also

guarantee a clean Windows OS, and consumed less power! For details: <a href="http://www.asrock.com/feature/InstantBoot/index.asp">http://www.asrock.com/feature/InstantBoot/index.asp</a>

- \* This function is applicable ONLY to single user that does not secure ID and Password to their systems.
- \* The boot up time depends on the hardware configuration.

#### 10 Times Faster, Only 4 Secs to Boot Up to Windows!

#### **ASRock YouTube**

http://tw.youtube.com/watch?v=BucljXZVxXo



#### **ASRock Instant Flash**

ASRock Instant Flash is an exclusive and the most userfriendly BIOS flash utility developed by ASRock. It is embedded in Flash ROM which is used to update the system BIOS without having to enter operating systems like MS-DOS or Windows.



#### **Features**

Once executing ASRock Instant Flash, the utility will automatically detect all devices such as USB, hard disk or even floppy drive to find the exact BIOS for your system. Instead of giving you all BIOS in your devices, the Instant Flash just list BIOS versions that apply to your motherboard model only. For example, if you have many different BIOS of different motherboards saved in your devices, but you just need to flash your P45 motherboard, the Instant Flash will just list the P45 BIOS versions for you. This unique function allows you to easily select the suitable BIOS version instead of browsing through all data.



Instant Flash just list BIOS versions that apply to your motherboard model.





Click and start Flashing!



NVIDIA® GeForce 7025 / nForce 630a











### CyberLink Power2Go 6.1 LE OEM

Power2Go 6 lets you burn and backup videos, photos, music and data onto Blu-ray Discs and DVDs.

### CyberLink MediaShow 4.1 SE OEM

Photo and video management software MediaShow edits videos and photos instantly, creates slideshow, and allows publishing directly to YouTube and Flickr.

### CyberLink PowerDVD 8.0 DTS Trial

World-renowned PowerDVD 8 DTS delivers outstanding DVD movie playback quality on your PC.

## **CyberLink PowerDirector 8.0 Trial**

PowerDirector - Video Editing software – edits high-definition videos including AVCHD, allows output to PSP iPod and Blu-ray Disc.

## CyberLink PowerBackup 2.5 Trial

PowerBackup backups valuable data on your PC.

#### **Creative Sound Blaster X-Fi MB Trial**

The Sound Blaster X-Fi MB solution provides premium audio quality, effects and features for PC systems equipped with onboard audio.

For gamers, the EAX® ADVANCED HD 4.0, with its state-of-the-art Multi-Environment rendering and reverb modelling, delivers a much more realistic and immersive 3D gaming experience than your motherboard audio ever will.