


# P45TS-R

Intel® P45 + ICH10R Chipsets

**ASRock**  
www.asrock.com

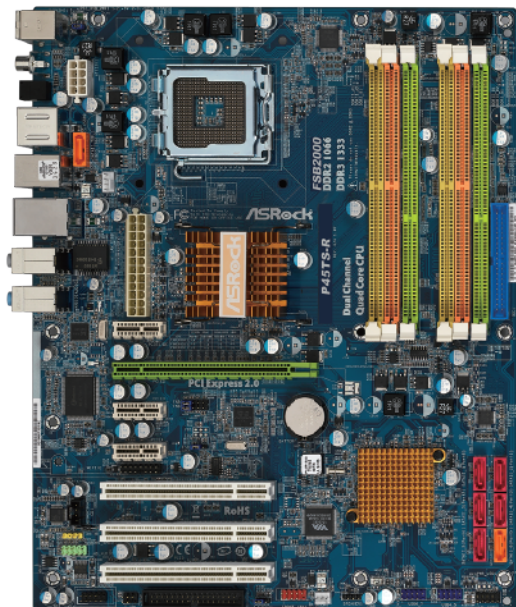

## Product Brief <<<

- LGA 775 for Intel® Core™ 2 Extreme / Core™ 2 Quad / Core™ 2 Duo / Pentium® Dual Core / Celeron® Dual Core / Celeron®, supporting **Penryn Quad Core Yorkfield and Dual Core Wolfdale** processors
- **All Solid Capacitor design (100% Japan-made high-quality Conductive Polymer Capacitors)**
- Compatible with **FSB2000/1600/1333/1066/800** MHz
- Supports Dual Channel **DDR3 1333/1066** (2 x DIMM slots) with max. capacity up to 4GB and Dual Channel **DDR2 1066/800/667** (4 x DIMM slots) with max. capacity up to 8GB
- 1 x **PCI Express 2.0** x16 slot (green @ x16 mode)
- **6 x SATAII 3.0 Gb/s** connectors, support RAID (RAID 0, RAID 1, RAID 10, RAID 5 and Intel® Matrix Storage), NCQ, AHCI and Hot Plug functions
- 1 x **eSATAII 3.0 Gb/s** connector
- **PCI-E Gigabit LAN** 10/100/1000 Mb/s
- Supports 2 x **IEEE1394** ports (one port on back panel, one header on board)
- 7.1 CH Windows® Vista™ Premium Level HD Audio with Content Protection, supports DAC with **110dB** dynamic range (**ALC890** Audio Codec)
- 1 x **WiFi/E** header
- **Windows® Vista™ Premium 2008 Logo Ready**
- Supports **ASRock OC Tuner, I. O. T.** (Intelligent Overclocking Technology)
- Supports **Smart BIOS**
- ASRock 1394\_SPDIF I/O: 1 x Coaxial SPDIF Out Port, 1 x Optical SPDIF Out Port, 1 x eSATAII port, 1 x IEEE 1394 Port, 1 x RJ-45 LAN Port with LED, 6 x USB 2.0 Ports

The specification is subject to change without notice. The brand and product names are trademarks of their respective companies. Any configuration other than original product specification is not guaranteed.

## Detail Specification <<<

<b>Platform</b>	- ATX Form Factor: 12.0-in x 9.6-in, 30.5 cm x 24.4 cm - All Solid Capacitor design (100% Japan-made high-quality Conductive Polymer Capacitors)
<b>CPU</b>	- LGA 775 for Intel® Core™ 2 Extreme / Core™ 2 Quad / Core™ 2 Duo / Pentium® Dual Core / Celeron® Dual Core / Celeron®, supporting Penryn Quad Core Yorkfield and Dual Core Wolfdale processors - Compatible with FSB2000/1600/1333/1066/800 MHz - Supports Hyper-Threading Technology - Supports Untied Overclocking Technology - Supports EM64T CPU
<b>Chipset</b>	- Northbridge: Intel® P45 - Southbridge: Intel® ICH10R
<b>Memory</b>	- Dual Channel DDR3/DDR2 memory technology - 2 x DDR3 DIMM slots - Supports DDR3 1333/1066 non-ECC, un-buffered memory - Max. capacity: 4GB - 4 x DDR2 DIMM slots - Supports DDR2 1066/800/667 non-ECC, un-buffered memory - Max. capacity: 8GB
<b>Expansion Slot</b>	- 1 x PCI Express 2.0 x16 slot (green @ x16 mode) - 3 x PCI Express x1 slots - 3 x PCI slots
<b>Audio</b>	- 7.1 CH Windows® Vista™ Premium Level HD Audio with Content Protection - DAC with 110dB dynamic range (ALC890 Audio Codec)
<b>LAN</b>	- PCI-E x1 Gigabit LAN 10/100/1000 Mb/s - Realtek RTL8111B/RTL8111C - Supports Wake-On-LAN
<b>Rear Panel I/O</b>	ASRock 1394_SPDIF I/O - 1 x PS/2 Mouse Port - 1 x PS/2 Keyboard Port - 1 x Coaxial SPDIF Out Port - 1 x Optical SPDIF Out Port - 6 x Ready-to-Use USB 2.0 Ports - 1 x eSATAII Port - 1 x RJ-45 LAN Port with LED (ACT/LINK LED and SPEED LED) - 1 x IEEE 1394 Port - HD Audio Jack: Side Speaker / Rear Speaker / Central / Bass / Line in / Front Speaker / Microphone
<b>Connector</b>	- 6 x SATAII 3.0 Gb/s connectors, support RAID (RAID 0, RAID 1, RAID 10, RAID 5 and Intel® Matrix Storage), NCQ, AHCI and Hot Plug functions - 1 x eSATAII 3.0 Gb/s connector (shared with 1 SATAII port) - 1 x ATA133 IDE connector (supports 2 x IDE devices) - 1 x Floppy connector - 1 x IR header - 1 x COM port header - 1 x HDMI_SPDIF header - 1 x IEEE 1394 header - CPU/Chassis FAN connector - 24 pin ATX power connector - 8 pin 12V power connector - CD in header - Front panel audio connector - 2 x USB 2.0 headers (support 4 USB 2.0 ports) - 1 x WiFi/E header
<b>BIOS Feature</b>	- 8Mb AMI BIOS - AMI Legal BIOS - Supports "Plug and Play" - ACPI 1.1 Compliance Wake Up Events - Supports jumperfree - SMBIOS 2.3.1 Support - CPU, DRAM, NB, SB, VTT Voltage Multi-adjustment - Supports I. O. T. (Intelligent Overclocking Technology) - Supports Smart BIOS
<b>Support CD</b>	- Drivers, Utilities, AntiVirus Software (Trial Version)
<b>Unique Feature</b>	- ASRock OC Tuner - Hybrid Booster: - CPU Frequency Stepless Control - ASRock U-COP - Boot Failure Guard (B.F.G.)
<b>Hardware Monitor</b>	- CPU Temperature Sensing - Chassis Temperature Sensing - CPU Fan Tachometer - Chassis Fan Tachometer - CPU Quiet Fan - Voltage Monitoring: +12V, +5V, +3.3V, CPU Vcore
<b>OS</b>	- Microsoft® Windows® 2000 / XP / XP 64-bit / Vista™ / Vista™ 64-bit compliant
<b>Certifications</b>	- FCC, CE, WHQL
<b>Accessories</b>	- Quick Installation Guide, Support CD, I/O Shield - Floppy/ATA 133 Cables - 2 x SATA Data Cables (Optional) - 1 x SATA 1 to 1 Power Cable (Optional)